

2-6 inch pipe annual output of 500kilometers, 8 inch hose annual output of 300 kilometers. It is suitable for land transportation of all kinds of media. It has the advantages of long continuous length andstrong environmental adaptability.




Table - Specification And Size Of Steel Reinforced Thermoplastic Continuous Pipe

Size	ID mm	Thickness mm	Tolerance mm	Nominal Pressure MPa				
T-DN40-PN 12	40	11	+ 0.50	12				
T-DN40-PN 16		12		16				
T-DN40-PN 20		12.5		20				
T-DN40-PN 25		14		25				
T-DN50 - PN 12	50	11.5		12				
T-DN50 - PN 16		12		16				
T-DN50 - PN 20		13.5		20				
T-DN50 - PN 25		14.5		25				
T-DN65 - Pn12	65	12.5		+0.60	12			
T-DN65- PN 16		13			16			
T-DN65 - PN 20		15			20			
T-DN65 - PN 25		15.5			25			
T-DN75 - PN 5.5	75	11			+0.70	5.5		
T-DN75 - PN 7		11.5				7		
T-DN75-PN 12		13.5				12		
T-DN75-PN 16		15				16		
T-DN100-PN 5. 5	100	12.5	+0.70			5.5		
T- DN100-PN 7		13.5				7		
T- DN100- PN 12		16				12		
T- DN100- PN 16		17				16		
T-DNI25-PN 5. 5	125	13				+0.70	5. 5	
T-DN125-PN 7		14					7	
T-DN146-PN 5. 5	146	14.5					+0.70	5. 5
T- DN146- PN 7		15.5						7



• ABOUT US •

Wudi Hizen Flexible Pipe Manufacturing Co., Ltd processing test methods, inspection rules, labeling, packaging, transportation and storage methods accords with technical requirements in SY/T 6662 standard to provide steel reinforced thermo plastic composite continuous pipe and joint design, manufacturing services. This product is suitable for land transportation of crude oil, gas, water and other fluid medium whose long-term working temperature is not more than 90 degrees.

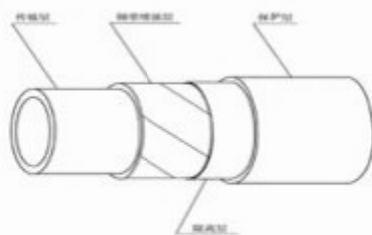

Phone : 022 – 86439887 0543 – 6573966

Mobile : 13602575030 18622757888 18931891239

Website : www.hizenflex.com

Email : sales@hizenflex.com

Address : No.615, Block C, Hitai Information Square, Tianjin, China
West Port Economic Park, Binzhou City, Shandong , China